

Physics 111 Laboratory Learning Outcomes

In preparation for the labs / lab exam, students should be familiar with the *learning outcomes* for each lab (listed below) as well as the *lab objectives* provided at the beginning of each lab.

Lab 1

Students can:

- make accurate & precise metric measurements using rulers and the triple-beam balance and quantify the resulting measurement uncertainty when using these tools
- document the propagation of errors when measured quantities are used in calculations and report final answers with appropriate significant figures & proper units
- draw conclusions regarding their results using comparisons with other experimental or standard values

Lab 2

Students can:

- understand the conditions necessary for static equilibrium
- draw & interpret free-body diagrams for an experimental system
- create an accurate scale diagram (vector polygon) from experimental values and use it to determine an unknown force in a system at equilibrium
- develop & solve algebraic expressions to determine an unknown force in a system at equilibrium

Lab 3

Students can:

- understand the conditions necessary for static equilibrium
- determine the centre of gravity for an irregular, plane body
- use a T-square, rulers and right-angled triangles to construct a precise graphical representation of a system of non-concurrent forces
- utilize measurement techniques to ensure that equilibrium conditions have been satisfied

Lab 4

Students:

- make accurate measurements of distances (with uncertainty) using combinations of rulers
- deepen their understanding of kinematics & energy conservation
- deepen their understanding of work & power and the relationship between them
- determine and collect the data required to calculate work & power

Lab 5

Students can:

- measure the volume of an (irregularly shaped) object
- determine the apparent mass of an object
- interpret their measurements using the concepts of buoyancy and Archimedes' Principle

Introduction to Measurement & Calculation

Significant Figures

Significant figures indicate the *reliably known digits* in an experimental value; they are typically *determined by the precision of the instrument(s) used to make the measurement(s)*. When performing calculations using measured values, keep in mind that not all digits in the answer displayed by your calculator are necessarily significant (*see Calculation & Significant Figures*).

In the lab we observe the following (standard) conventions regarding significant figures:

1. All non-zero digits ARE significant
2. Zeroes *between* non-zero digits ARE significant
3. *Leading zeroes* are NOT significant
4. *Trailing zeroes* ARE significant *IF* there is a decimal point
5. All digits ARE significant when a number is expressed in *scientific notation*

(Example) The numbers 19.7, 80, 0.0031 and 0.2050 have 3, 1, 2 and 4 significant figures respectively. As written, 15,600 would have 3 sig figs; if written as 15,600. (with an explicit decimal point) it would be considered to have 5 sig figs. One could avoid potential confusion by using scientific notation, i.e. writing 1.56×10^4 for 3 sig figs or 1.5600×10^4 for 5 sig figs.

Precision and Accuracy

Precision and **accuracy** are terms which are often (*incorrectly!*) used interchangeably.

Precision refers to how well a value is known. There is no such thing as an exact measurement; there is *always* some error or uncertainty associated with it. The uncertainty in a measurement may be very small, but it is never zero. The uncertainty describes the range of values within which you are reasonably sure the measurement lies. The smaller the uncertainty, the more precisely the value is known. Precision may be indicated by the number of decimal places in a value.

(Example) The acceleration due to gravity is found by various experimental methods to be 9.8, 9.81 and 9.805 m/s². The third value, 9.805 m/s², is the most precise because it is determined to within one thousandth of a m/s² (3 decimal places). The first value, 9.8 m/s², is the least precise because it is only determined to one tenth of a m/s² (1 decimal place).

Accuracy refers to how close a result is to the actual or true value.

(Example) 9.7 m/s² is a more accurate value of the acceleration due to gravity than 9.6 m/s² is, since the expected value is 9.8 m/s² (to two significant figures). The values are equally precise, however, since they are both determined to a tenth of a m/s² (1 decimal place).

Recording of Experimental Values

In the physics lab experimental values will be recorded to the precision of the measuring instrument, which is taken to be the smallest division indicated on the instrument. This must however be tempered with reasonable judgment as cases may arise where the precision of a given measurement is much less than the (theoretical) precision of the measuring instrument.

It is good experimental practice to record all measurements *as read directly from an instrument or measuring device*, WITHOUT any unit conversion or calculation. For example, if a scale used to measure mass reads in grams, record any measurements made with that instrument in grams. Then, if necessary, convert to kilograms (or other units) but only *after* the initial measurement is made and recorded in grams.

Metre Stick (metric scale or metric ruler)

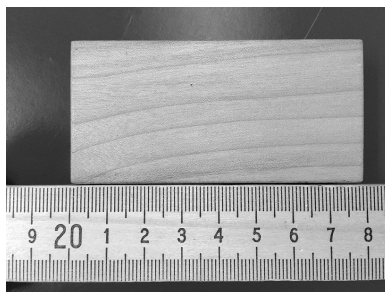


Figure A: measurement of a rectangular block

The familiar metre stick is usually divided into centimetres and tenths of centimetres (millimetres), with the centimetres being numbered - for example, see Figure A. The smallest divisions are tenths of a cm (1 mm) and **therefore the precision of the metre stick is 1 mm or 0.1 cm**. If the ruler is transparent and the graduations are on the underside, it may be laid flat on the object. If the ruler is not transparent, or if the graduations are on the upper surface, the ruler should be held on edge so that the graduations are in contact with the object, reducing reading errors due to parallax.

A linear distance measured with a ruler consists of two readings, which are the positions of both ends of the object. Typically, the “zero” end of a metre stick is in poor condition and is *not* used as one of the positions; otherwise, any other convenient line on the metre stick may be used. As a single step, a complete length measurement would be recorded as:

$$\text{Length} = (\text{position of one end of block}) - (\text{position of other end of block}) = (\text{length of block})$$

(Example) The measurement of the length of the block in Figure A would be recorded as:

$$\text{Length} = 27.9 \text{ cm} - 20.0 \text{ cm} = 7.9 \text{ cm}$$

Lengths may be measured *directly* if a (plastic) ruler has a well defined “zero” (i.e. using 0.0 cm).

Triple Beam Balance

The triple-beam balance derives its name from the three beams which carry the counterweights that balance the weight on the pan. The balance determines the mass m of an object by exploiting the linear relationship $W = mg$ between an object's weight W & the gravitational acceleration g ; this allows the balance to be graduated directly in mass units (e.g. readings yield mass in grams).

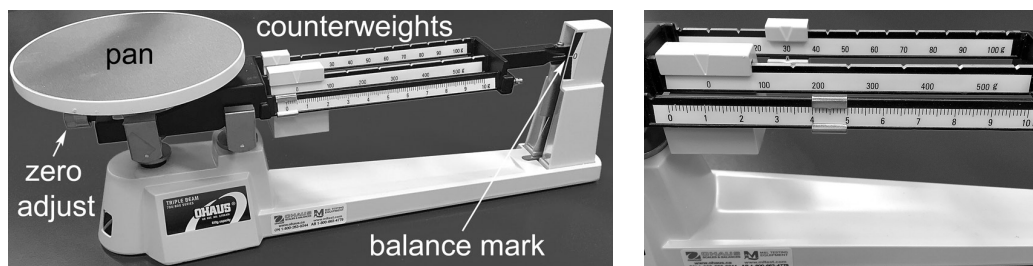


Figure B: Triple beam balance (left); closeup of counterweights when measuring (right).

The object whose mass is to be determined is placed on the pan and a balance condition is achieved by moving, *in order*, the counterweights on the hundreds beam, the tens beam and the units beam. A static balance condition is indicated by the pointer on the beam being lined up with the central mark on the scale. The hundreds and tens beams have notches in which the counterweights *must* sit in order for them to be in the correct positions. The units counterweight may be placed at any position along its beam, the position being shown by the pointer in the centre of the counterweight. The smallest division on the units beam is 0.1 g and **therefore the precision of the triple-beam balance is 0.1 g, i.e. to the nearest tenth of a gram.**

The balance is subject to a zero error, i.e. when all the counterweights are set at 0, the pointer may not be lined up with the central mark on the frame. The zero point is adjusted by turning the adjustment knob beneath the pan. The zero reading *must* be properly set BEFORE using the balance.

(Example) Assuming proper zeroing, the balance reading in Figure B is $30.0 + 0.0 + 4.5 = 34.5$ g.

Calculation & Significant Figures

1). When **adding or subtracting** numbers, the precision of the sum or difference is the same as that of the *least precise number* in the set.

(Example) $4.513 + 3.9 = 8.413$ is rounded to 8.4 because 3.9 is only good to one decimal place.

(Example) $110 + 39.5 = 149.5 = 150$ since 110 ($=1.1 \times 10^2$) is only good to the 'tens' place.

2). When **multiplying or dividing** numbers, the number of significant figures in the product or quotient is the same as that of the number in the set which has the *fewest significant figures*. **Note:** multiplication or division by a constant does *NOT* affect the determination of significant figures.

(Example) $\frac{4.513 \times 7.8}{2.001} = 17.5919$ is rounded to 18 because 7.8 has only two significant figures.

3). When dealing with **mixed calculations** (e.g. combinations of addition, subtraction, multiplication and division one calculation) **it is necessary to perform the calculation in steps**, obeying *mathematical order of operations*, in order to determine the proper significant figures in the final answer. **You CANNOT do such calculations in a single step with your calculator and properly account for significant figures.** To minimize round-off error it is common practice to retain (at least) one EXTRA digit during steps in a calculation and mark the position of the least significant digit by underlining it, e.g. $7.02\text{\underline{3}}6$ or $591.\text{\underline{4}}22$ where the final 6 or 22 to the right of the underlined digit are NOT significant.

(Example) Calculate the volume of a rectangular solid if the length, width and height are measured to be 16.0 cm, 7.95 cm and 3.9 cm, respectively.

$$V = L \times W \times H = (16.0)(7.95)(3.9) = \text{\underline{496.1}} = 5.0 \times 10^2 \text{ cm}^3$$

Since all of the operations are multiplication/division, we can do this calculation in one step, applying the rule for sig figs & multiplication/division. In this case our final answer should have two sig figs, since that is the lowest number of sig figs in the product; note that this results in rounding UP to 500 and that scientific notation is required to clarify that only two digits are significant.

(Example) Calculate the density of the solid (above) if its mass is measured as 280.9 g.

$$\rho = \frac{m}{V} = \frac{280.9}{\text{\underline{496.1}}} = 0.5\text{\underline{6}}6 = 0.57 \text{ g/cm}^3$$

Since all of the operations are multiplication/division, we can do this calculation in one step, applying the rule for sig figs & multiplication/division. In the calculation we use the **unrounded** value of the volume but note its least significant digit for the purposes of rounding our final answer.

(Example) Calculate the surface area of a rectangular solid if the length, width and height are measured to be 16.0 cm, 7.95 cm and 3.9 cm, respectively.

$$\begin{aligned} \text{Area} &= 2LW + 2LH + 2WH \\ &= 2(16.0)(7.95) + 2(16.0)(3.9) + 2(7.95)(3.9) \\ &= 25\text{\underline{4}}.4 + 12\text{\underline{4}}.8 + 6\text{\underline{2}}.01 \\ &= 44\text{\underline{1}}.21 \\ \text{Area} &= 440 \text{ cm}^2 \text{ or } 4.4 \times 10^2 \text{ cm}^2 \end{aligned}$$

Using order of operations, the multiplications are performed FIRST. We apply the rule for sig figs & multiplication/division to EACH of the three terms; as each term contains a number with a minimum of two sig figs, this determines what we can retain for the product. Note that we ignore the impact on sig figs of the constant '2' in each term and keep an extra digit (or two) after the underlined significant digit for each term. NOW the addition is performed and we apply the rule for sig figs & addition/subtraction; in this case, our least precise value in the sum is known only to the 'tens' and so we round our final answer appropriately and add units.

NOTE: IF the area were used in a later calculation we would utilize the **unrounded** value but underline the least significant digit for the purposes of applying the sig fig rules during that calculation.

Comparing Values

1). **Percent difference** compares two **rounded** experimental measurements:

$$\text{Percent Difference} = \frac{(\text{higher value} - \text{lower value})}{\text{average value}} \times 100\%$$

Percent difference is **always positive** and is **reported with at most 2 significant figures**.

(Example) Two students measure a rectangular block and calculate its volume. One finds the volume to be 27 cm^3 while the other gets 28 cm^3 . The percent difference between their results is

$$\begin{aligned}\text{Percent Difference} &= \frac{(\text{high} - \text{low})}{\text{average}} \times 100 \\ &= \frac{(28 - 27)}{27.5} \times 100 = \frac{1}{27.5} \times 100 = 3.636\% = 4\%\end{aligned}$$

2). **Percent deviation** compares a **rounded** experimental measurement with its **expected value**:

$$\text{Percent Deviation} = \frac{(\text{experimental} - \text{expected})}{\text{expected}} \times 100\%$$

Percent deviation may be **positive or negative** (i.e. whether the *rounded* experimental value is greater than or less than the expected value) and is **reported with at most 2 significant figures**.

Percent deviation is sometimes also referred to as **percent error**.

(Example) A student calculates the density of aluminum to be 2.5 g/cm^3 ; the published or expected value is 2.70 g/cm^3 . The percent deviation is

$$\begin{aligned}\text{Percent Deviation} &= \frac{(\text{experimental} - \text{expected})}{\text{expected}} \times 100 \\ &= \frac{(2.5 - 2.70)}{2.70} \times 100 = \frac{-0.20}{2.70} \times 100 = -7.407\% = -7\%\end{aligned}$$

3). **Commenting** on your comparisons

You are expected to **comment** on *whether your calculated agreement is within the maximum acceptable lab error of 5%* (which reflects the uncertainty of most instruments in our first year lab).

(Examples) Comments for the comparisons shown above might read as follows:


Our volumes differ by 4% and are in good agreement as they fall within the acceptable 5% lab error.

Our experimental value for the density is 7% below the expected value, which is greater than the acceptable 5% lab error; as such, our result is NOT in agreement with the expected value. (reasons?)


Laboratory 1 Pre-Lab (value: 2 marks)

Submit to your lab instructor *ALONG WITH YOUR LAB* at the *END* of the lab period.

1. Which of the following values is the most *precise*: 9.891m, 989.10m, 98910.0m? Why?
2. How many significant figures are there in (a) 2.005 (b) 1001 (c) 0.00380 (d) 1.6×10^4 (e) 300?
3. Perform the following calculations, using the rules given in this lab for significant figures:
(a) $4.1 + 2.95$ (b) $8.12 - 1$ (c) $272/2.2$ (d) 2.005×8.9 (e) $(10. + 4.2)/1.2$
4. Determine the measured (a) length and (b) mass in the images below; *show all steps/work!*

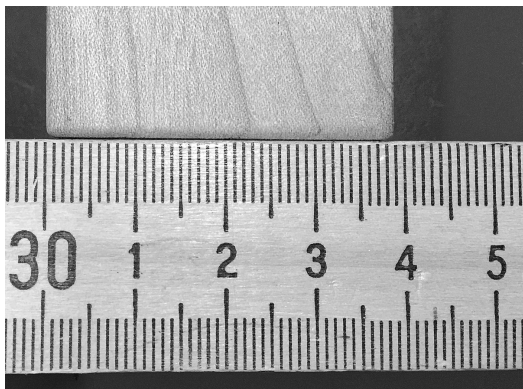

(a)

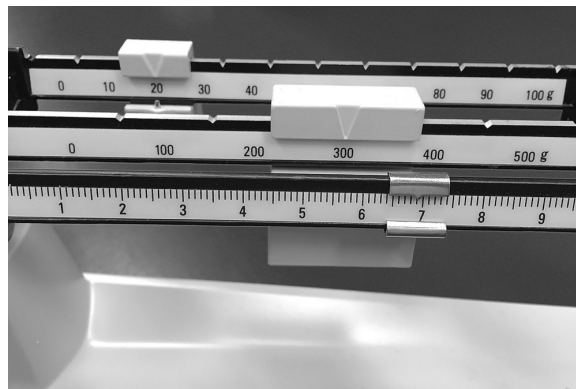

(b)

5. A block's volume is found experimentally in two trials to be 27cm^3 and 28cm^3 , respectively. *Compare* the volumes with each other using *percent difference*; round for sig figs, showing all work.

Laboratory 1: Measurement, Precision & Scaling

Experiments are to be completed on the provided laboratory sheets below; any supporting material (eg. graphs) should be attached. Make sure your name and your partners name(s) are clearly indicated on the front page of your lab. **Neatness and clarity count!** Explain your answers clearly and concisely. If an equation is to be used in a calculation, *write the equation down* and then insert numbers and solve. Report your final answer to the appropriate significant figures.

The lab write-up is due by the end of the lab. Late labs will not be accepted.

APPARATUS

Metre stick, metre stick callipers (2), triple-beam balance, small & large wooden blocks, large white bucket filled with tennis balls, tennis ball ‘track’ (holder).

OBJECTIVE

1. To learn how to properly use a ruler and a triple beam balance to make measurements.
2. To become familiar with *experimental uncertainty* as it applies to such measurements.
3. To practice working with *significant figures* in measurements & during calculations.

THEORY

In this experiment, the linear dimensions and the masses of two similar rectangular blocks are measured. The volumes, surface areas and densities of the blocks are then determined. The ratios of the linear dimensions, the surface areas and the volumes of the two blocks are compared in order to determine the relationship, if any, between the two blocks.

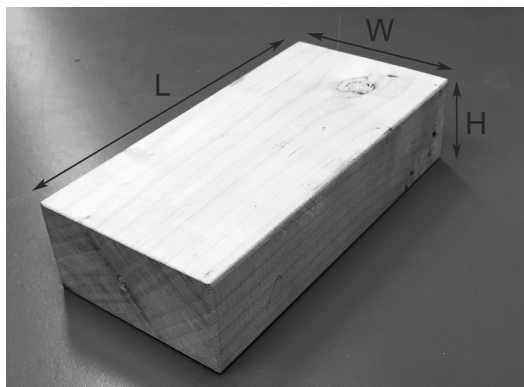


Figure 1: dimensions for a rectangular block

Volume

A *rectangular block* of length L , width W and height H will have a volume given by

$$V = L \times W \times H \quad (1)$$

An example is shown in Figure 1, with the sides chosen such that $L > W > H$.

A *sphere* of radius R (or diameter $D = 2R$) will have a volume given by

$$V = \frac{4}{3}\pi R^3 = \frac{\pi D^3}{6} \quad (2)$$

A *cylinder* of radius R (or diameter $D = 2R$) and height H will have a volume given by

$$V = \text{Area of base} \times H = \pi R^2 \times H = \frac{\pi D^2 \times H}{4} \quad (3)$$

Density

The density ρ of an object is found by dividing its mass m by its volume V ,

$$\rho = \frac{m}{V} \quad (4)$$

The most commonly used units for density are g/cm^3 or kg/m^3 .

Surface area

A *rectangular block* of length L , width W and height H will have a surface area given by

$$A = 2LW + 2LH + 2WH \quad (5)$$

Laboratory 1: Measurement, Precision & Scaling

Part A: Measurements of the two blocks

- Check that the balance reads zero when the weights are in their zero positions. Adjust if required.
- [1 mark] Record the mass of the LARGE block (*with units*): $m_{large} =$ _____.
- [1 mark] Choose an ‘easy’ reference graduation on the metre stick (e.g. the 10.0 cm mark) as your zero reading. **Using the definitions given in Figure 1**, place the *length* L of the block against the metre stick with one end aligned with your selected zero position. Record both the zero position and the position of the other end of the block in the table below and calculate the length of the block using these values. Do this for BOTH (opposite) sides of the block. Repeat this process for the *width* W and *height* H . **Make sure to utilize correct significant figures.**

Large block dimensions (cm)			
	End position (cm)	Zero position (cm)	Calculated size (cm)
length (side 1)			
length (side 2)			
width (side 1)			
width (side 2)			
height (side 1)			
height (side 2)			

- [1 mark] Record the mass of the SMALL block (*with units*): $m_{small} =$ _____.
- [1 mark] Repeat the same six (6) measurements you made above but for the SMALL block. **DO NOT make a table for your length measurements**; instead, show your work as *one line per measurement INCLUDING your zero value*, e.g. $L_1 = 18.1 - 10.0 = 8.1\text{ cm}$. Watch your sig figs!

6. [1 mark] Why do we *need* to measure *both* sides of the blocks (i.e. 2 lengths, 2 widths, etc.)?

7. [3 marks] **Calculate** the *average* length, *average* width, and *average* height for EACH of the blocks and **record your results in the table**. Then **calculate** the *ratio* s for EACH average dimension (e.g. $L_{avg}^{large}/L_{avg}^{small}$, etc.) and **record these results in the table**. **Show a FULL set of sample calculations** in the space below the table for your WIDTH (middle column) calculations (ONLY), *including equations, calculation steps, rounding & correct sig figs*.

Hint: perform calculations in steps - unexpected sig fig results arise in a couple of the cases!

	average length L_{avg} (cm)	average width W_{avg} (cm)	average height H_{avg} (cm)
large block			
small block			
ratio s (large/small)			

Calculate the *average ratio* s_{avg} & **comment** on how the large block is related to the small one.

8. Tidy the apparatus.

Part B: Volume and Density

1. [2 marks] **Calculate the volume of each block** using its *average* dimensions & Equation 1 (in the Theory). *Show all work FULLY - equations, calculation steps, rounding & correct sig figs.*

2. [2 marks] Since *each* dimension of the large block is (approximately) s_{avg} times larger than the corresponding dimension of the small block, we expect the volume of the large block to be $s_{avg} \times s_{avg} \times s_{avg} = s_{avg}^3$ times larger than the volume of the small block. **Calculate** s_{avg}^3 (using your value of s_{avg} from Part A). **Then calculate the ratio of the volumes**, V_{large}/V_{small} (using your *unrounded* volumes) and **compare it to** s_{avg}^3 using *percent difference*; use properly *rounded* values when calculating *percent difference*. **Comment on the agreement.** *Show all work FULLY - equations, calculation steps, rounding & correct sig figs.*

3. [2 marks] **Calculate the *density* of each block** using its mass, *unrounded* volume & Equation 4. *Show all work FULLY - equations, calculation steps, rounding & correct sig figs.*

4. [2 marks] **Compare** the *rounded* densities of the two blocks using *percent difference* and **comment**. *Show all work fully.* **How *should* the densities compare to each other? Why?**

Part C: Surface Area

5. [2 marks] Calculate the *surface area* of each block using its *average* dimensions & Equation 5. Show all work *FULLY* - equations, calculation steps, rounding & correct sig figs.

6. [**2 marks**] Since *each* dimension of the large block is (approximately) s_{avg} times larger than the corresponding dimension of the small block, we expect any surface on the large block to be $s_{avg} \times s_{avg} = s_{avg}^2$ times larger than the same surface on the small block. **Calculate** s_{avg}^2 (using your value of s_{avg} from Part A). **Then calculate the ratio of the areas**, A_{large}/A_{small} (using your *unrounded* surface areas) and **compare it to** s_{avg}^2 using *percent difference*; use properly *rounded* values when calculating *percent difference*. **Comment on the agreement.** *Show all work FULLY - equations, calculation steps, rounding & correct sig figs.*

Part D: How many tennis balls fit in the bucket?

1. Slide the provided *metal calipers* onto the meter stick, vertical edges facing *inward*. Align the inner edge of one caliper with an ‘easy’ reference value (*e.g.* 10.0 cm) and lock it in place. The other caliper should be left just loose enough to adjust its position easily without it sliding freely.
2. [**1 mark**] Place *one* (1) tennis ball on the provided ‘track’ (so it will not roll). Using the meter stick with the calipers, adjust the moveable caliper until the FULL diameter of the tennis ball fits snugly between the metal caliper ‘jaws’ *WITHOUT* deforming the ball. **Record the positions of the calipers** on the metre stick (**in cm**) and determine the diameter D of a single tennis ball:

$$D = D_f - D_i = \text{_____} = \text{_____}.$$

3. [**2 marks**] Place *ten* (10) tennis balls snugly side-by-side on the provided ‘track’. Using the meter stick with the calipers, **determine the FULL length** L_{10} of all ten tennis balls (**in cm**):

$$L_{10} = L_f - L_i = \text{_____} = \text{_____}.$$

Calculate the average diameter of a single tennis ball, $D_{avg} = L_{10}/10$. Show ALL work & watch your sig figs! What benefit(s) are there in determining the diameter by averaging ten tennis balls rather than only measuring a single tennis ball?

4. [**1 mark**] **Calculate the average volume of a single tennis ball, $V_{avgball}$, using your unrounded average tennis ball diameter D_{avg} & Equation 2. Show ALL work & watch your sig figs.**

5. [1 mark] Using the meter stick with the calipers, **measure the height H_{bucket} and the diameters of the top AND bottom of the white cylindrical bucket (in cm):**

$$H_{bucket} = H_f - H_i = \underline{\hspace{2cm}} = \underline{\hspace{2cm}}.$$

$$D_{top} = D_f - D_i = \underline{\hspace{2cm}} = \underline{\hspace{2cm}}.$$

$$D_{bot} = D_f - D_i = \underline{\hspace{2cm}} = \underline{\hspace{2cm}}.$$

Calculate D_{avg} , the average diameter of the bucket, using D_{top} and D_{bot} . Show ALL work.

6. [1 mark] **Calculate V_{bucket} , the *average* volume of the white bucket, using *unrounded* bucket height H_{bucket} , *unrounded* average bucket diameter D_{avg} , & Equation 3. Show ALL work.**

7. [2 marks] How many tennis balls will fit into the white bucket? To determine this, **divide** the *unrounded* volume of the bucket V_{bucket} by the *unrounded* average volume of a tennis ball $V_{\text{avg ball}}$; watch your sig figs! Then **truncate your answer** to determine the *integer* number of (whole) balls which should fit in the bucket. *Show ALL work.*

of tennis balls in bucket = _____ = _____ (truncated value).



Figure 2: spheres packed randomly into a cylinder

Our calculation above assumes the bucket is *completely* filled by tennis balls; however, it is obvious when looking at the ‘full’ bucket that *there is a lot of empty space between tennis balls* as they do not ‘align’ perfectly and create gaps in three dimensions (*see Figure 2*). According to theory, spheres only occupy 55% of the available volume when thrown randomly into a container (*‘random loose packing’*), so revise your estimate to account for this by multiplying your *unrounded* number of balls from above by 0.55 and then *truncating your result to a whole number of balls*:

revised # of tennis balls in bucket = _____ $\times 0.55$ = _____ = _____.

Compare your revised estimate with the actual # (94) using percent deviation. Comment.

8. Tidy the apparatus.

